

# PowerFlow-2-10G

## Industrial 10G Core Switch



- Flexible deployment scenarios using xSTP, ERPS and ultra-fast recovery with PF-ring and PF-chain
- L2 with security features
- Variety of input voltage and POE feeding options including POE+
- Ethernet switching
- Wide Operating Temperature

PowerFlow-2-10G are industrial grade Ethernet switches equipped with 4 10G SFP+ ports with two combinations of UNI ports. The first includes 20 GbE SFP ports plus 4 combo GbE ports, and the second supports 24 GbE copper ports with or without PoE (up to 400W) and 4 GbE SFP ports. The devices have fanless design with redundant, isolated power supplies and can be mounted in 19-inch EIA standard rack. PowerFlow-2-10G offers various L2 Ethernet functions (IGMP, VLAN, QoS, ACL, Security, IPv6 for management, bandwidth control, and port mirroring) and also supports PF-Ring redundancy protocol. The switches can also be centrally managed by RADview.

### MARKET SEGMENTS AND APPLICATIONS

PowerFlow-2-10G applications include power utilities, railways, traffic controllers, and safe city applications which require advanced Layer 2 functionality and which in many cases are PoE intensive or need to aggregate multiple 1GbB rings. PowerFlow-2-10G systems are fully compliant with the requirement of 50121-4 for railways. The switches provide a variety of redundant functions to increase the reliability and deployment flexibility of the communications system, including variety of Ethernet functions, such as xSTP, G.8032 and ultra-fast recovery using PS-ring and PF-chain unique features. Dual DC (dual AC or combination) power supplies address a wide range of installation scenarios.

### INTEROPERABILITY

PowerFlow-2-10G devices are compatible with PowerFlow-2 and SecFlow-2 (RSTP, ERPS).

### ETHERNET

PowerFlow-2-10G supports IEEE802.1q, IEEE802.1d and relevant parts of IEEE802.3.

### RESILIENCY

#### Ethernet Ring Protection

PowerFlow-2-10G supports STP, RSTP, MSTP, ITU-T G.8032v1, G.8032v2 Ethernet Ring Protection Switching (ERPS), and PF-Ring for redundant cabling.

PowerFlow-2-10G provides 14 ring instances, while each can support the PF-Ring, PF-Chain or Sub-Ring type for flexible networking applications.

PF-Ring can be established for Redundant Ethernet Ring, having recovery time < 10ms with up to 250 units.

### LAG

The full Gigabit capability supports Link Aggregation (Dynamic IEEE 802.3ad LACP) with up to 14 trunk group (maximum 8 ports per group) to increase bandwidth, thus providing high-performance quick transfer of large amounts of video, voice and data across a network.



### TIMING AND SYNCHRONIZATION

PowerFlow-2-10G supports IEEE1588 PTPv2 for precise time synchronization to operate in Transparent Clock mode by each port.

### MONITORING AND DIAGNOSTICS

Diagnostic features include RMON (1, 2, 3, 9 group), RMON II, RFC1213 MIB II, IP Source Guard, and Port Mirroring.

### MANAGEMENT AND SECURITY

PowerFlow-2-10G can be managed via:

- CLI
- Web-based application
- SNMPv1, SNMPv2c, SNMPv3

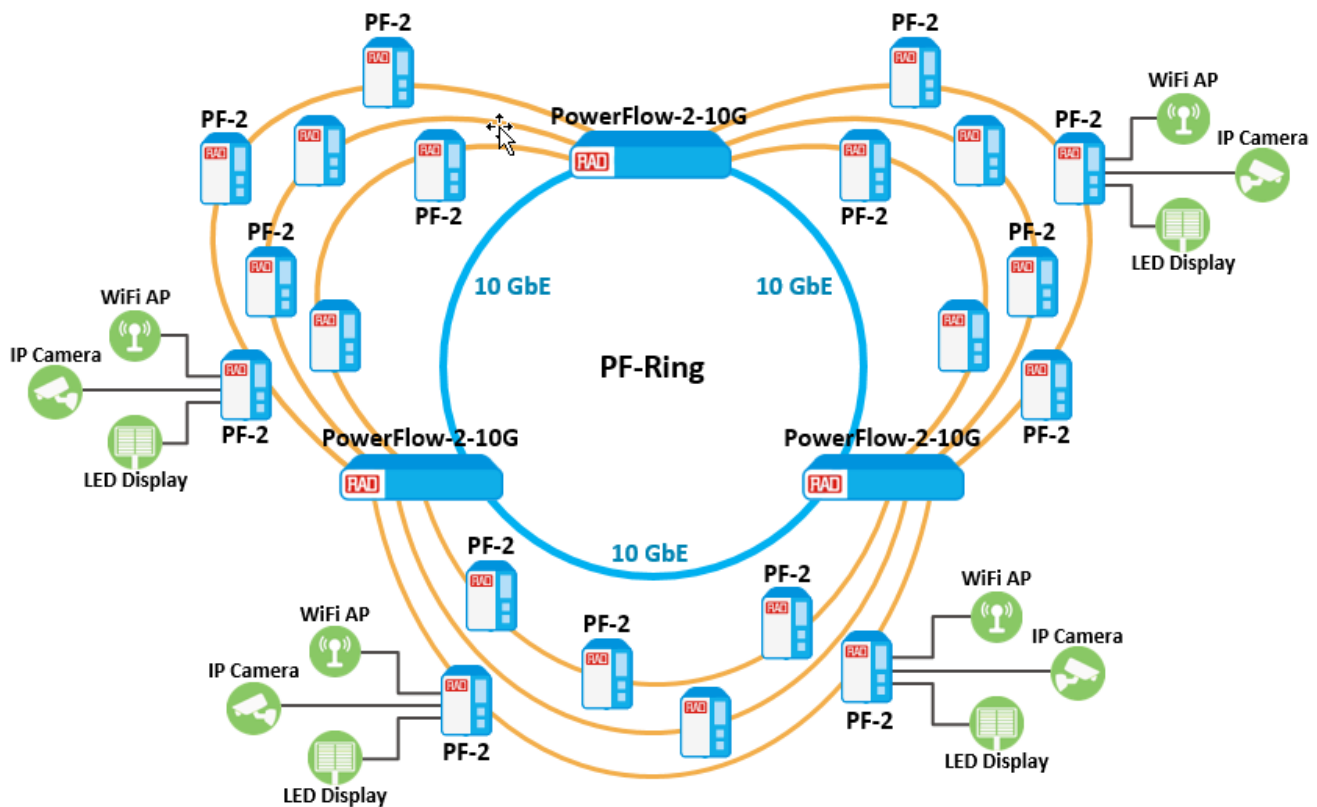


Figure 1. 10GbE Backbone Application

# PowerFlow-2-10G

## Industrial 10G Core Switch

## Data Sheet

### Specifications

#### CAPACITY

Switching Capacity	Up to 136 Gbps
Forwarding Rate	Up to 107.136Mpps
Max. Frame Size	Jumbo Frame: 10K
MAC Address Table	32K
Memory Buffer	4MB for packet buffer

#### ETHERNET INTERFACES

Ports	See Table 1
Power over Ethernet (PoE)	PoE+ (30W per port): 802.3at
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID
	IEEE 802.1ad Q-in-Q
	MAC-based VLAN, up to 256 entries
	IP Subnet-based VLAN, up to 128 entries
	Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries
	VLAN Translation, up to 256 entries
	MVR (Multiple VLAN Registration)
	GVRP (GARP VLAN Registration Protocol)

#### MANAGEMENT

Control Port	RS-232 interface, RJ-45 connector
Management Port	SFP Model: dedicated MGMT port UTP model: any of the UTP ports (1-24)
Options	CLI with password-protected access
	Web-based
	SNMPv3

#### TIMING

Clients	NTP client
	SNTP client
IEEE1588 PTP V2	Transparent Clock

#### SECURITY

ACL	L2: MAC address SA/DA/VLAN
	L3: IP address SA/DA, Subnet
	L4: TCP/UDP
TACACS+	
RADIUS	
HTTPS, HTTP	
SSL/SSH v2	
IEEE 802.1X	Port-based
	MAC-based

#### QUALITY OF SERVICE (QOS)

Traffic Classification	IEEE802.1p based CoS
QoS	IP Precedence based CoS
	IP DSCP based CoS
	QCL (QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI
	QCE (QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control	Ingress: port-based
	Egress:
	<ul style="list-style-type: none"><li>Port-based</li><li>Per queue / Per port shaper</li></ul>
DiffServ (RF 2474)	
Remarking	
Storm Control	Unicast, Broadcast, Multicast
IGMP/MLD	IGMP Snooping v1, v2, v3
	MLD Snooping v1, v2
	Port Filtering Profile
	Throttling
	Fast Leave
	Maximum Multicast Group: up to 1022 entries
	Query/Static Router Port

# PowerFlow-2-10G

## Industrial 10G Core Switch

## Data Sheet

### RESILIENCY

ERPS v2	Recovery time <50ms
	Single Ring, Sub-Ring, and Multiple ring topology network
	Up to 14 instances of PF-Ring. PF-Chain or Sub-Ring with up to 250 nodes in a ring
Link Aggregation	Static (Hash with SA, DA, IP, TCP/UDP port), up to 16 trunk groups
	Dynamic (IEEE 802.3ad LACP), up to 16 trunk groups
	Up to 8 ports per group

### DIAGNOSTICS

Alarm Relay	Relay outputs with current carrying capacity of 1 A @24VDC, 2-Pin removable terminal block
Indicators	LED indicators for power and link activity
Syslog	Syslog server
	Warning messages

### GENERAL

Environment	
Housing	Rugged Metal
	IP30 Protection
	Fanless
For the rest, see Table 2	
Physical	
See Table 2	
Power	
See Tables 2,3	

Table 1. PowerFlow-2-10G Product Options, Feature Comparison

Specification		PF-2-10G/ETR/48R/ 4SFPP/4SFP/24PH PF-2-10G/ACR/ 4SFPP/4SFP/24PH	PF-2-10G/ETR/48R/ 4SFPP/4SFP/24U	PF-2-10G/48R/ 4SFPP/4ETH/20SFP	PF-2-10G/ACR/ 4SFPP/4ETH/20SFP	PF-2-10G/ACDC/ 4SFPP/4ETH/20SFP
Interfaces	10/100/1000 Base-T(x) RJ-45 interfaces	24	24	-	-	-
	GbE UTP/SFP Combo	-	-	4	4	4
	FE/GbE SFP interfaces	4	4	20	20	20
	1G/2.5G/10GBase-X SFP+ interfaces	4	4	4	4	4
	PoE interfaces	24	-	-	-	-
	Total	32	32	28	28	28
Management	CLI	+	+	+	+	+
	Web-based	+	+	+	+	+
	Modbus/TCP	+	+	-	-	-
	IPv6 Management	+	+	+	+	+
	IEEE 802.1ag CFM	+	+	+	+	+
	ITU-T Y.1731 performance monitoring (PM)	+	+	+	+	+
	Advanced PoE Management	+	-	-	-	-

**Table 2. Power, Physical, and Environmental Specifications – PowerFlow-2-10G Product Options**

Specifications		PF-2-10G/ETR/48R/ /SFPP/4SFP/24PH PF-2-10G/ACR/ 4SFPP/4SFP/24PH	PF-2-10G/ETR/48R/ 4SFPP/4SFP/24U	PF-2-10G/48R/ 4SFPP/4ETH/20SFP	PF-2-10G/ACR/ 4SFPP/4ETH/20SFP	PF-2-10G/ACDC/ 4SFPP/4ETH/20SFP
Compliance	Hi-pot protection	+	+	-	-	-
	4KV surge protection	+	+	-	-	-
Power	Power Supply	ETR/48R option: Dual redundant 48 VDC ACR option: Dual redundant 110/220 VAC (85VAC~264VAC)	Dual redundant 48 VDC	Dual redundant 48 VDC	Dual redundant wide range AC/HVDC (100 – 240V)	1x48 VDC and Wide range AC/HVDC (100– 240 V)
	Power Consumption	30.4W	33W	See Table	See Table	See Table
	PoE Power Budget	ETR/48R option: 400W ACR option: 150W	-	-	-	-
	Total Power Consumption	33W without PoE load ETR/48R option: 430W ACR option: 209W with 150W PoE load	33W	-	-	-
	Negative voltage power input support*	-	+	+	+	+
Size	Height, cm (inch)	4.4 (1.73)	4.4 (1.73)	4.4 (1.73)	4.4 (1.73)	4.4 (1.73)
	Width, cm (inch)	44 (17.3)	44 (17.3)	44 (17.3)	44 (17.3)	44 (17.3)
	Depth, cm (inch)	ETR/48R option: 31.5 (12.4) ACR option: 33.0 (13.0)	31.5 (12.4)	31.5 (12.4)	31.5 (12.4)	31.5 (12.4)
	Weight, kg (lb)	ETR/48R option: 4.46 (9.8) ACR option: 5.2 (11.5)	4.26 (9.4)	4.2 (9.3)	4.76 (10.5)	4.51 (9.9)
Storage Temperature			-40 to +85°C (-40 to 185°F)			
Operating Temperature			Fanless ETR/48R option: -10 to +60°C (14 to 140°F) ACR option: -40 to +60 C (-40 to 140°F)			
Humidity			5% to 95% (non-condensing)			
*POE type devices do not support negative DC voltage (-48V) redundancy.						

**Table 3. PF-2-10G/\*\*\*/4SFPP/4ETH/20SFP Power Consumption**

Input Voltage	Consumption
110VAC/VDC	34.4W
220VAC/VDC	34.4W
48VDC	33.4W

# PowerFlow-2-10G

## Industrial 10G Core Switch

## Data Sheet

### Ordering

#### RECOMMENDED CONFIGURATIONS

##### PF-2-10G/ETR/48R/4SFPP/4SFP/24PH

Dual redundant 48 VDC power supply, four 1G/2.5G/10G SFP+ ports, four 100/1000Base-X SFP ports, 24 10/100/1000 Base-T(X) ports, PoE+ (400W)

##### PF-2-10G/ACR/4SFPP/4SFP/24PH

Dual redundant 110/220VAC (85VAC~264VAC) power supply, four 1G/2.5G/10G SFP+ ports, four 100/1000Base-X SFP ports, 24 10/100/1000 Base-T(X) ports, PoE+ (maximum 150W)

##### PF-2-10G/ETR/ 48R/4SFPP/4SFP/24U

Dual redundant 48 VDC power supply, four 1G/2.5G/10G SFP+ ports, four 100/1000Base-X SFP ports, 24 10/100/1000 Base-T(X) ports

##### PF-2-10G/48R/4SFPP/4ETH/20SFP

Dual redundant 48 VDC power supply, redundant 48VDC power supply, four 1G/2.5G/10G SFP+ ports, four 100/1000Base Combo (UTP/SFP) ports, 20 x 100/1000Base-X SFP ports

##### PF-2-10G/ACR/4SFPP/4ETH/20SFP

Dual redundant wide-range AC/HVDC power supply, four 1G/2.5G/10G Base-X SFP+ ports, four 100/1000Base Combo (UTP/SFP) ports, 20 x 100/1000Base-X SFP ports

##### PF-2-10G/ACDC/4SFPP/4ETH/20SFP

48 VDC and wide-range AC/HVDC power supplies, four 1G/2.5G/10G Base-X SFP+ ports, four 100/1000Base Combo (UTP/SFP) ports, 20 x 100/1000Base-X SFP ports

#### SPECIAL CONFIGURATIONS

Please contact your local RAD partner for additional configuration options

#### SUPPLIED ACCESSORIES

##### PF-CBL-RJ45-DB9

Console cable RJ-45 to DB9

##### PF-2-TB

Terminal block for power input connector as per specific device

##### PF-2-10G-RM-KIT

Rack-mount kit for mounting the unit into 19-inch rack

#### OPTIONAL ACCESSORIES

##### SFP Transceivers

###### SFP-2DH

Fast Ethernet/STM 1, DDM, internal calibration, industrially hardened, 1310 nm, single mode, laser, 15 km (9.3 mi)

###### SFP-6DH

Gigabit Ethernet, DDM, internal calibration, industrially hardened, 1310 nm, single mode, laser, 10.0 km (6.2 mi)

###### SFP-30H

Multirate 10/100/1000 copper SFP, industrially hardened, 100m (328 f)

##### External Power Supplies

###### SF-AC-48VDC-40W (to be used with non-POE options)

External DIN rail AC to 48 VDC power supply, 40 W, -20 to 60°C (-4 to 140°F); 20 W at 60°C (140°F) and above

###### SF-AC-48VDC-120W

External DIN rail AC to 48 VDC power supply, 120 W, -20 to 60°C (-4 to 140°F); 60 W at 65°C (149°F) and above

###### SF-24VDC-48VDC-240W

24 VDC to 48 VDC power supply, 240 W, -40 to 50°C (-40 to 122°F); 120 W at 65°C (149°F) and above

###### SF-AC-12VDC-40W

AC to 12 VDC power supply, 40 W, -20 to 60°C (-4 to 140°F); 20 W at 65°C (149°F) and above

##### International Headquarters

24 Raoul Wallenberg St., Tel Aviv 6971923, Israel  
Tel 972-3-6458181 | Fax 972-3-7604732  
Email [market@rad.com](mailto:market@rad.com)

##### North American Headquarters

900 Corporate Drive, Mahwah, NJ 07430, USA  
Tel 201-529-1100 | Toll Free: 800-444-7234 | Fax: 201-529-5777  
Email [market@radusa.com](mailto:market@radusa.com)



Your Network's Edge®

[www.rad.com](http://www.rad.com)

738-100-03/22 (1.0) Specifications are subject to change without prior notice. © 2017–2022 RAD Data Communications Ltd. RAD products/technologies are protected by registered patents. To review specifically which product is covered by which patent, please see [ipr.rad.com](http://ipr.rad.com). The RAD name, logo, logotype, and the product names MINID, Optimux, Airmux, IPmux, and MICLK are registered trademarks of RAD Data Communications Ltd. All other trademarks are the property of their respective holders.